


HEAVY DUTY INDUSTRIAL IMPACT WRENCHES

Mechanisms

Pin Clutch – (DYNA PACT CLUTCH)

Two Pin Clutch hammers strike the anvil, provides high torque, low vibration and fast run downs.

This mechanism delivers higher performance and extended durability.



Pin Hammer

Good connection of Pin & Hammer produces excellent stability and durability.

It generates in credible high torque and low vibration.



Thin Hammer

Unique Mechanism for continuous torque increase with two solid ring hammers.

It delivers an instantaneous, balanced blow.

More powerful than any other mechanism on the market.



Features / Benefits :

Heavy Duty for toughest applications.

Highest torque output to weight ratio in industry.

Available Twin Hammer or Pin Clutch Mechanisms for maximum versatility.

Minimum Noise and Vibration.

Available in 3/4", 1" and 1.1/2" square drives.


Uses standard air supply.



TIW - 27



TIW - 48

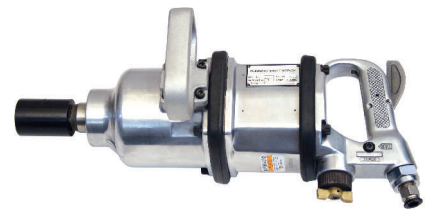

TIW - 76

Model No.	TIW - 27	TIW - 48	TIW - 76
Bolt Capacity	27 mm (1.1/8")	48 mm (1.7/8")	76 mm (3")
Square Drive Size	3/4"	1"	1.1/2"
Max. Torque	1018 Nm (750 ft.lb)	2712 Nm (2000 ft.lb)	4068 Nm (3000 ft.lb)
Air Inlet	1/4"	3/8"	1/2"
Hose Size (mm)	10	13	19
Sound Level (dBA)	95	95	95
Vibration (m/s ²)	3/4	5.5	11.0
Air Pressure Needed	90 psi (6 bar)	90 psi (6 bar)	90 psi (6 bar)
Net Weight (kg)	4.8	10.8	16.9

